

TECHNICAL DATASHEET

150W Desktop C6 Adapter Series



Applications

- Industrial
- Test and Measurement
- Peripherals
- Networking

Features

- Non-Vented Case
- Class B EMI
- 5,000 Meter Operating Altitude
- US DoE Level VI Efficiency Compliance
- Ecodesign/ErP Lot 7 (EU) 2019/1782 Compliance
- EU CoC Ver 5 Tier 2 Compliance

Safety Standards



Dimensions

143.0 x 66.5 x 23 mm
(5.63 x 2.62 x 0.91 in)

Specifications


AA150M Series Specifications¹

Model		AA150M-190B-R	AA150M-240B-R
Output	DC Output Voltage	19V	24V
	Max Current	7.9A	6.25A
	Output Power	150.1W	150.0W
	Regulation	± 5%	
	Ripple & Noise P-P(max) ³	300mV	
Input	AC Input Voltage Range	90 to 264VAC	
	AC Input Frequency	47 to 63Hz	
	Input Current	2.25A (RMS) max at 115VAC/60Hz 1.25A (RMS) max at 230VAC/50Hz	
	No Load Power Consumption	0.0679W at 115VAC input 0.1091W at 230VAC input	0.068W at 115VAC input 0.088W at 230VAC input
	Average Efficiency ³	90.11% at 115VAC input 90.91% at 230VAC input	90.00% at 115VAC input 91.09% at 230VAC input
	230VAC 10% Load Efficiency ³	81.96%	83.1%
	Leakage Current	250uA max	
Protection	Over-Voltage	Output voltage shall not exceed 26V (Latch)	Output voltage shall not exceed 36V (Latch)
	Short Circuit	Auto recovery and no component damage	
	Over-Current	<13A Auto recovery	<10A Auto recovery
Environmental	Operating Temperature	-5°C to +40°C	
	Non-Operating Temperature	-25° to +65°C	
	Operating Humidity	95% RH max	
Safety Approvals and EMC	Dielectric Withstand (HI-POT)	Primary to Secondary: 3000VAC for 1min, 10mA Primary to PE: 1500VAC, for 1min, 10mA	
	Insulation Resistance	Primary to Secondary: >100M ohm for 500VDC	
	Standards	UL & IEC 62368-1	
	EMI Emissions	FCC Part 15 Class B, CAN ICES-003(B)/NMB-003(B), EN 55032/CISPR 32 Class B Conducted and Radiated	
	Harmonic Current Emissions	IEC 61000-3-2	
	Voltage Fluctuations & Flicker	IEC 61000-3-3	
	Immunity	EN 55035/CISPR 35: IEC 61000-4-2 (+/- 8kV air, +/- 4kV contact), IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5 (+/-1kV L-L, +/-2kV L-PE), IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	
Mechanical	Dimensions (L x W x H)	143mm (5.63in) x 66.5mm (2.62in) x 23mm (0.91in)	
	Cable Length	1500mm	
	DC Output Connector	2.5mm x 5.5mm x 11.0mm	
	Input Connector	IEC 60320 C6	
Notes	1. The specifications defined are at ambient temperature of 25°C, unless otherwise specified. 2. Measuring is done by 20MHz bandwidth oscilloscope and terminated each output with a 10uF low ESR aluminum electrolytic capacitor and a 0.1uF ceramic capacitor.		


	3. Efficiency is measured after 30min. burn-in
--	--

Model		AA150M-480B-R	AA150M-540B-R
Output	DC Output Voltage	48V	54V
	Max Current	3.12A	2.78A
	Output Power	149.76W	150.12W
	Regulation	-3% / + 5%	
	Ripple & Noise P-P(max) ³	480mV	540mV
Input	AC Input Voltage Range	90 to 264VAC	
	AC Input Frequency	47 to 63Hz	
	Input Current	2.25A (RMS) max at 115VAC/60Hz 1.25A (RMS) max at 230VAC/50Hz	
	No Load Power Consumption	0.0945W at 115VAC input 0.1076W at 230VAC input	0.1245W at 115VAC input 0.1487W at 230VAC input
	Average Efficiency ⁴	90.97% at 115VAC input 91.83% at 230VAC input	90.82% at 115VAC input 91.68% at 230VAC input
	230VAC 10% Load Efficiency ⁴	83.77%	81.50%
	Leakage Current	250uA max	
Protection	Over-Voltage	Output voltage shall not exceed 60V (Latch)	
	Short Circuit	Auto recovery and no component damage	
	Over-Current	<6A	<5.4A
Environmental	Operating Temperature	-20°C to +40°C	
	Non-Operating Temperature	-25° to +65°C	
	Operating Humidity	95% RH max	
Safety Approvals and EMC	Dielectric Withstand (HI-POT)	Primary to Secondary: 3000VAC for 1min, 10mA Primary to PE: 1500VAC, for 1min, 10mA	
	Insulation Resistance	Primary to Secondary: >100M ohm for 500VDC	
	Standards	UL & IEC 62368-1	
	EMI Emissions	FCC Part 15 Class B, CAN ICES-003(B)/NMB-003(B), EN 55032/CISPR 32 Class B Conducted and Radiated	
	Harmonic Current Emissions	IEC 61000-3-2	
	Voltage Fluctuations & Flicker	IEC 61000-3-3	
	Immunity	EN 55035/CISPR 35: IEC 61000-4-2 (+/- 8kV air, +/- 4kV contact), IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5 (+/-1kV L-L, +/-2kV L-PE), IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	
Mechanical	Dimensions (L x W x H)	143mm (5.63in) x 66.5mm (2.62in) x 23mm (0.91in)	
	Cable Length	1500mm	
	DC Output Connector	2.5mm x 5.5mm x 11.0mm	
	Input Connector	IEC 60320 C6	
Notes	1. The specifications defined are at ambient temperature of 25°C, unless otherwise specified. 2. Measuring is done by 20MHz bandwidth oscilloscope and terminated each output with a 10uF low ESR aluminum electrolytic capacitor and a 0.1uF ceramic capacitor. 3. Efficiency is measured after 30min. burn-in		


AA150M Outline Drawing

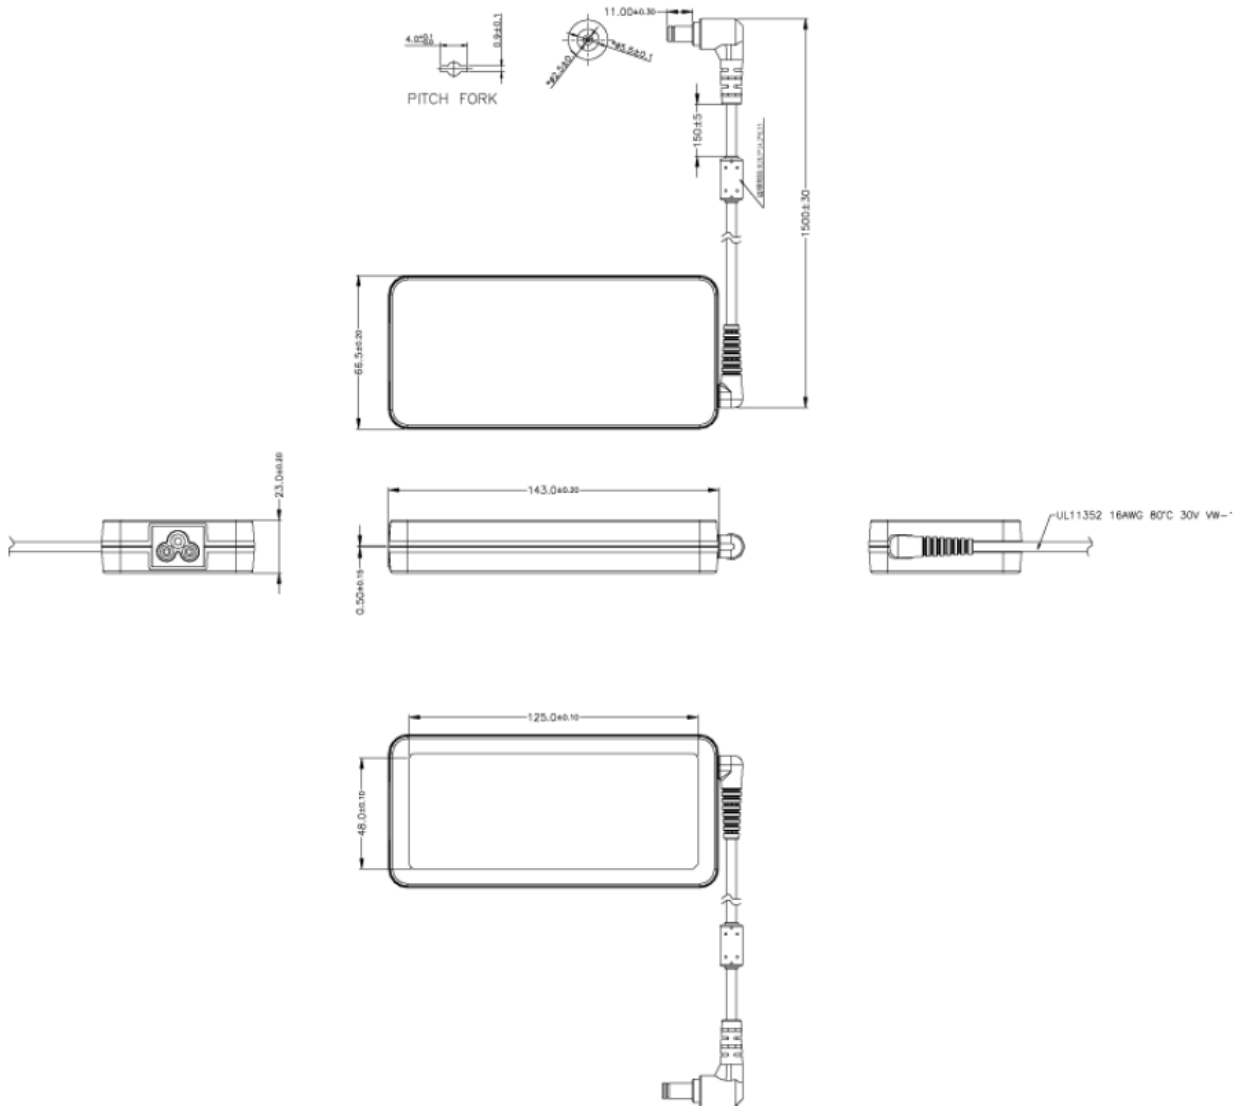

Line Cords-Sold Separately

Model		AC30UNA-R
Specifications	Plug Type	North America NEMA 5-15P
	Connector	IEC320 C6
	Wire Size	18 AWG
	Temperature	60°C
	Amperage Rating	7A
	Voltage Rating	125V
	Cable Length	1829mm
Safety Approvals		CSA; UL
Photos		

Line Cords Outline Drawings

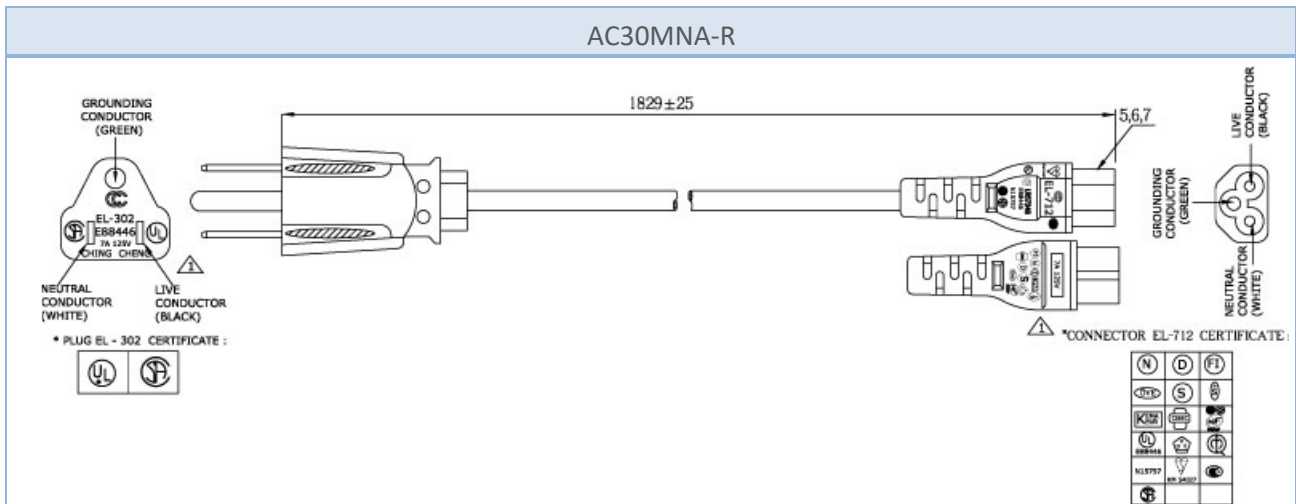

Phihong Locations



Headquarters Phihong Technology Co., Ltd
 No.568, Fuxing 3rd Rd., Gueishan Dist., Taoyuan City (33383), Taiwan
 Tel : +886-3-3277288
 Fax : +886-3-3277622
 phsales@phihong.com.tw
 www.phihong.com.tw



Phihong Technology Co. Ltd. (Tainan R&D Center)
 No. 99, Zhengnan 1st. Street, Yongkang Dist., Tainan City 71046, Taiwan
 Tel : +886-6-254-7588
 Fax : +886-6-254-7288
 phsales@phihong.com.tw
 www.phihong.com.tw



Phihong China
 Room 101, Building 5, 133-1 Tiesong Road, Qingxi Town, Dong Guan City, Guangdong (523642), China
 Tel : +86-769-87736405
 phsales@phihong.com.tw



Phihong USA
 47800 Fremont Blvd., Fremont, CA 94538, U.S.A.
 Tel : +1-510-445-0100
 Fax : +1-510-445-1678
 usasales@phihongusa.com
 www.phihong.com



Phihong Japan
 PMOEX Nihonbashi Kayabacho 10F, 2-12-10
 Nihonbashi Kayabacho, Chuo City, Tokyo 103-0025 Japan
 Tel : +81-3-6626-5513
 Fax : +81-3-6629-0241
 phsales@phihong.com.tw
 www.phihong.co.jp



Phihong Vietnam
 Lot CN5 An Duong Industrial Zone, Hong Phong Commune, An Duong County, Hai Phong City, Vietnam
 Tel : +84-22588-31557