

TECHNICAL DATASHEET

15 Watt Fixed Wall Plug Series Adapter Meets Level VI Requirements



Applications

- Wireless Communications
- Portable Equipment
- Peripherals
- PDA

Features

- Limited Power Source (LPS)
- Class B EMI
- Level VI Compliant
- Class II Double Insulated
- High Efficiency
- Low Cost

Safety Standards



- UL/cUL 62368-1

Dimensions

71.7 x 50 x 33.2 mm
(2.82 x 1.97 x 1.31 inch)

Weight

145g (5.12g)

Output Specifications

Model	DC Output Voltage	Load		Ripple ⁽¹⁾ P-P (max.)	Regulation Line & Load
		Min.	Max.		
PSC15A-050-R	5V	0A	3.0A	100mV	±5%
PSC15A-060-R	5.9V	0A	2.5A	100mV	±5%
PSC15A-075-R	7.5V	0A	2.0A	100mV	±5%
PSC15A-090-R	9V	0A	1.67A	120mV	±5%
PSA15A-120P6-R	12V	0A	1.25A	100mV	±5%
PSA15A-120P6-R	15V	0A	1.0A	100mV	±5%
PSA15A-240P6-R	24V	0A	0.65A	200mV	±5%
PSA15A-480P6-R ¹	48V	0A	0.31A	400mV	±5%

Notes:

1. NRCan approval for PSA15A-480P6-R model only
2. Measured after 30 minutes with by-pass capacitors 0.1uF/10uF at output connector terminal and oscilloscope set at 20Mhz.


Specification¹

Model		PSX15A
Input	AC Input Voltage Rating	100 to 240V AC
	AC Input Voltage Range	90 to 264V AC
	AC Input Frequency	47 to 63Hz
	Input Current	0.5A (RMS) maximum at 120V AC 0.25A (RMS) maximum at 240V AC
	Inrush Current	0.5A (RMS) maximum at 120V AC 0.25A (RMS) maximum at 230V AC
	Leakage Current	0.25mA maximum at all line conditions
	Inrush Current	<40A for 120V AC at maximum load <60A for 240V AC at maximum load (Cold start at ambient 25°C)
	Input Power Saving	0.1W maximum at no load
Output	Efficiency ²	US DOE Level VI
Environmental	Operating Temperature	0° to +40°C
	Non-Operating Temperature	-40° to +85°C
	Operating Humidity	20 to 90%
	Emissions	Complies with FCC Class B Complies with EN55032 Class B
	Immunity	IEC610004-2 、 IEC610004-3 、 IEC610004-4 、 IEC610004-5 、 IEC610004-6 、 IEC61000-4-8 、 IEC61000-4-11 、 EN61000-3-2
	Hold-up Time	8mS minimum at 120V AC and maximum load
	Over-Voltage Protection	Zener clamping if voltage exceeds 120% of limit

	Over-Current Protection	Output equipped with short circuit protection – auto-restart
	Short-Circuit Protection	Output can be shorted without damage
	Dielectric Withstand (Hi-pot) Test	Primary to Secondary: 3000V AC for 1 min., 10mA
	DC Output Connector	2.1 x 5.5mm Center Positive Barrel

Phihong is not responsible for any error and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

Dimensional Diagram Unit: mm

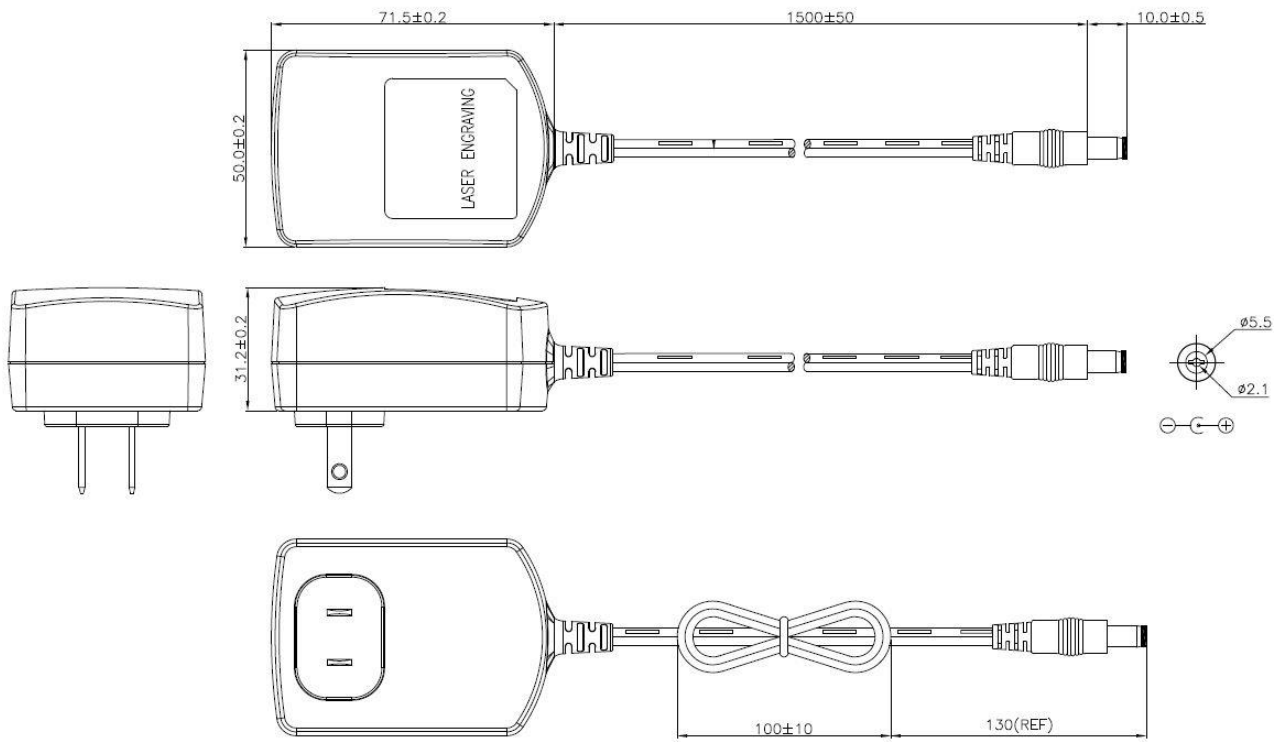

Phihong Locations



Headquarters Phihong Technology Co., Ltd
No. 568, Fuxing 3rd Rd., Gueishan Dist., Taoyuan City (33383), Taiwan
Tel : +886-3-3277288
Fax : +886-3-3277622
phsales@phihong.com.tw
www.phihong.com.tw



Phihong Technology Co. Ltd. (Tainan R&D Center)
No. 99, Zhengnan 1st. Street, Yongkang Dist., Tainan City 71046, Taiwan
Tel : +886-6-254-7588
Fax : +886-6-254-7288
phsales@phihong.com.tw
www.phihong.com.tw



Phihong China
Room 101, Building 5, 133-1 Tiesong Road, Qingxi Town, Dong Guan City, Guangdong (523642), China
Tel : +86-769-87319026
Fax : +86-769-87317106
phsales@phihong.com.tw



Phihong USA
47800 Fremont Blvd., Fremont, CA 94538, U.S.A.
Tel : +1-510-445-0100
Fax : +1-510-445-1678
usasales@phihongusa.com
www.phihong.com



Phihong Japan
PMOEX Nihonbashi Kayabacho 10F, 2-12-10
Nihonbashi Kayabacho, Chuo City, Tokyo 103-0025 Japan
Tel : +81-3-6626-5513
Fax : +81-3-6629-0241
phsales@phihong.com.tw
www.phihong.co.jp



Phihong Vietnam
Lot CN5 An Duong Industrial Zone, Hong Phong Commune,
An Duong County, Hai Phong City, Vietnam
Tel : +84-22588-31557